www.heatlinkgroup.com

Indoor Sensor
Submittal - Page 1 of 1


Job or Customer :	
Location :	
Engineer :	
❑ Complies with Spec ❑ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description
The 30076 Indoor Sensor includes a 10 kΩ thermistor which provides accurate measurement of the indoor temperature. The 30076 can be mounted directly on the wall using two #6 - 1" screws

Technical Data
Material:.....White PVC plastic
Sensor: .....NTC thermistor, 10 kΩ @ 77°F (25°C±0.2°C) ß=3892
Operating Range: .....-50˚C to 60˚C / -60˚F to 140˚F

Standards / Listings
CSA C US

Qty	Stk. #	Dimensions A	B	C	Weight
	30076	2-7/8" (73 mm)	2-7/8" (73 mm)	13/16" (21 mm)	0.16 lb 72 g

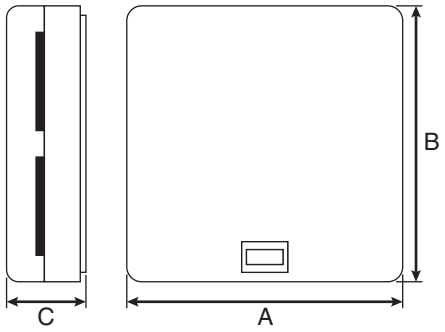

Installation
Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents
• Component Warranty

Head Office: 4603E - 13th Street NE, Calgary, AB, T2E 6M3
Mississauga Office: 1555 Bonhill Road, Unit #7, Mississauga, ON, L5T 1Y5
Grand Rapids Office: 1000 - 100th Street SW, Suite B, Byron Center, MI, 49315
Toll Free: 1-800-661-5332 • Canada Fax: 1-866-450-1155 • USA Fax: 1-800-869-6098

©2009 HeatLink Group Inc.