www.heatlinkgroup.com

Flange Mixing Valve Motor
Submittal - Page 1 of 1

Job or Customer :	
Location :	
Engineer :	
❑ Complies with Spec ❑ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description
Mixing Valve Motor used to automatically operate 4-way flange mixing valves. Motor is reversible and is provided with fixed limit switches. Requires a 31000 series mixing control.


Technical Data
Power Supply: ..... 24 V(ac) 50/60 Hz
Power Consumption: ..... 3.5 VA
Cable Length: ..... 2 m / 6.6 ft

Standards / Listings
CE

Qty	Mixing Valve Size	Stk. #	Dimension A	Dimension B	Dimension C	Dimension D	Motor Speed	Torque	Weight
	2-1/2", 3", 4"	58199	5-1/2" (140 mm)	3-11/16" (94 mm)	3-5/16" (84 mm)	~3" (~76 mm)	150 sec/90°	30 Nm	4 lb 1.8 kg

Sample Wiring



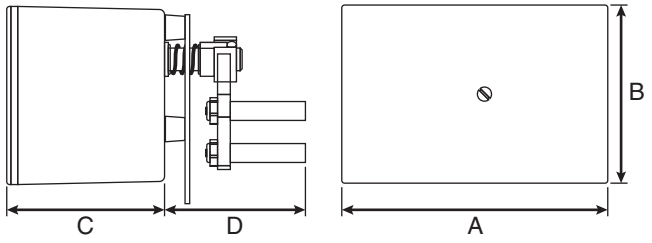

Installation
Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents
• Mixing Valve Motor for 2-1⁄2", 3", & 4" Flange Mixing Valve Mounting Instructions (L658199)
• Component Warranty

Toll Free: 1-800-661-5332
Canada Fax: 1-866-450-1155
USA Fax: 1-800-869-6098

©2011 HeatLink Group Inc.

This page is intentionally blank.