www.heatlinkgroup.com

HeatLink® Digital Timer Thermostat
Submittal - Page 1 of 2

Job or Customer :	
Location :	
Engineer :	
❑ Complies with Spec ❑ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Digital Timer Thermostat with a fully menu driven large digital display provides proportional integral temperature regulation for maximum comfort and efficiency. Offers adjustable characteristics for optimization for various system types (high mass, low mass, baseboard, fan coil and cooling). Room, floor or combined sensor operation with an optional external sensor. Take control with the easy to program 7 day 24 hour timer utilizing 9 preset programs and the ability to program 4 additional user programs. This thermostat is capable of generating a setback signal that can be best utilized with a StatLink® module and shared with other thermostats. Intelligent Temperature Control System for intelligent setback functionality. Menu selectable standard/automatic/setback/freeze protection operation. Optional pump exercise functionality


Technical Data

Operating Voltage:..... 24V(ac)
Power Consumption: ..... 2.5 VA max
Operating Temperature:..... 0˚C to 50˚C / 32˚F to 122˚F
Setting Temperature: ..... 5˚C to 30˚C / 41˚F to 86˚F
Differential at 20˚C / 68˚F: ..... 0.5˚C / 0.9˚F
Output:..... 15W triac
Protection Class: ..... IP 30
Temperature Sensor:..... 10kΩ NTC thermistor
Program Backup:..... Indefinitely
Clock Backup:..... 1 day

Standards / Listings

CE
Meets Class B Canadian ICES FCC Part 15


Qty	Stk. #	Dimensions A	B	C	Weight
	46643	5" (125 mm)	3-3/8" (86 mm)	1-3/8" (35 mm)	7.1 oz 200 g

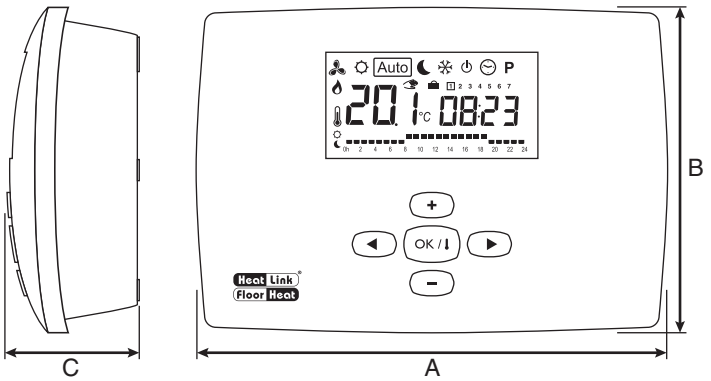

Head Office: 4603E - 13th Street NE, Calgary, AB, T2E 6M3
Mississauga Office: 1555 Bonhill Road, Unit #7, Mississauga, ON, L5T 1Y5
Grand Rapids Office: 1000 - 100th Street SW, Suite B, Byron Center, MI, 49315
Toll Free: 1-800-661-5332 • Canada Fax: 1-866-450-1155 • USA Fax: 1-800-869-6098

©2009 HeatLink Group Inc.

Sample Wiring Diagram

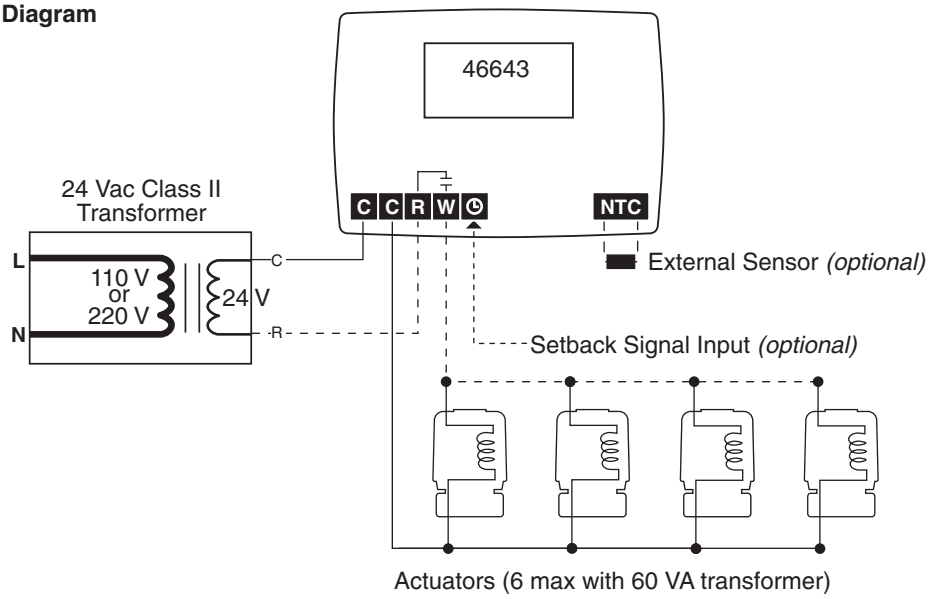

Installation

Installation of the thermostat must follow all of HeatLink's instructions and guidelines, including those in the thermostat installation instructions, and StatLink Technical Guide.

Related Documents

- Digital Timer Thermostat Installation Instructions (L646643)
- StatLink Technical Guide (L3710)
- StatLink Brochure (L3330)
- Component Warranty

Head Office: 4603E - 13th Street NE, Calgary, AB, T2E 6M3
Mississauga Office: 1555 Bonhill Road, Unit #7, Mississauga, ON, L5T 1Y5
Grand Rapids Office: 1000 - 100th Street SW, Suite B, Byron Center, MI, 49315
Toll Free: 1-800-661-5332 • Canada Fax: 1-866-450-1155 • USA Fax: 1-800-869-6098

©2009 HeatLink Group Inc.
SUB46643
2009-06-17