

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Optional outdoor sensor for SMCP & SMP panels.


Technical Data

Sensor:..... NTC 12k (25°C = 12kΩ)
Range:..... -40°F to 148°F (-40°C to 70°C)

Standards / Listings

CE 89/392/EEC

Qty	Stk. #	Dimension			Weight
		A	B	C	
	ETF1733/44/55	1.34" (34mm)	2.17" (55mm)	1.02" (26mm)	0.075 lb (34 g)

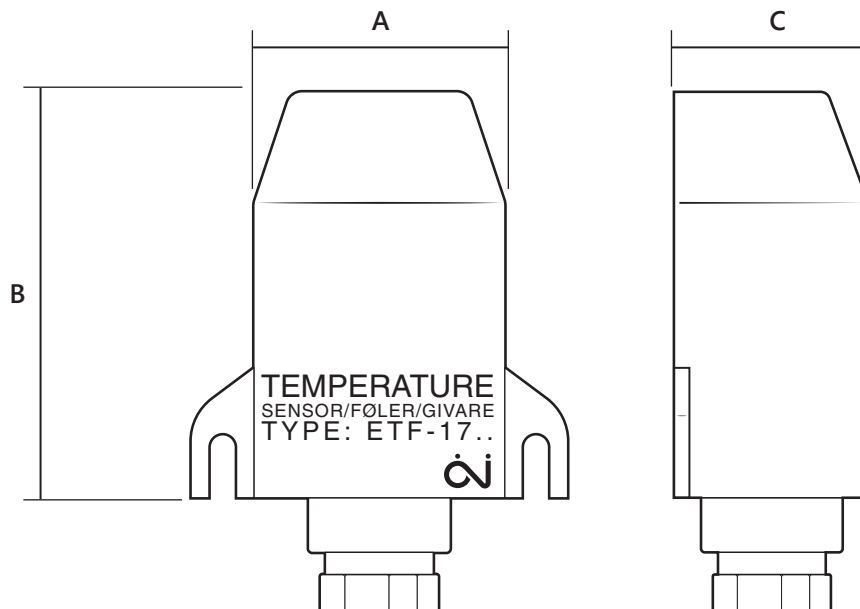

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents

- HeatLink Limited Heating Warranty

This page is intentionally blank.