

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid brass fittings couples PEX tubing to PEX tubing.


Technical Data

Material:..... Brass (JIS C-3604)
Operating Temperature:..... 82.2°C / 180°F
Operating Pressure:..... 0.69 MPa / 100 psi

Standards / Listings

Manufactured to B137.5 & F-877

Qty	Size	Stk. #	Dimension				Weight
			A	B	C	D	
	3/8"	69012	1-3/4" (44 mm)	5/8" (15.5 mm)	1" (25.12 mm)	7/8" (22 mm)	0.22 lb 100 g
	1/2"	69005	2" (51 mm)	5/8" (15.5 mm)	1" (26 mm)	15/16" (24 mm)	0.29 lb 130 g
	5/8"	69019	2" (51 mm)	11/16" (16.5 mm)	1-5/16" (33 mm)	1-3/16" (30 mm)	0.44 lb 200 g
	3/4"	69022	2-1/8" (53 mm)	11/16" (16.5 mm)	1-7/16" (36 mm)	1-1/4" (32 mm)	0.51 lb 230 g

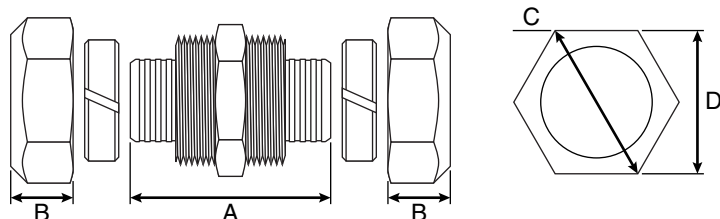

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the Installation Guide.

Related Documents

- HeatLink Installation Guide (L3390)
- Coupling Assembly Instructions (L669000)
- HeatLink Limited Heating Warranty

This page is intentionally blank.