PEX × M/Sweat Straight Ball Valve - No Lead Brass

Job or Customer :	
Location :	
Engineer :	
❑ Complies with Spec ❑ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description
No lead brass straight ball valve for ½" tubing.


Technical Data
Material:..... No Lead Eco Brass - C69300
Working Pressure:..... 100 psi maximum
Tested Pressure:..... 100 psi
Maximum Temperature:..... 82°C / 180°F

Listings
IAPMO UPC
CSA

Standards
ANSI/NSF 61
ANSI/NSF 372
ASME A112.18.1/CSA B125.1
ASTM F1807
ASTM F877

Qty	Stk. #	Size	Dimension A	Dimension B	Dimension C	Dimension ID	Weight
	23405NL	½" PEX x ½" M/sweat	2.4" (62.5mm)	1.2"" (31.7mm)	0.6" (15.8mm)	0.35" (8.9 mm)	150 g (5.3 oz)

Dimensional Diagram

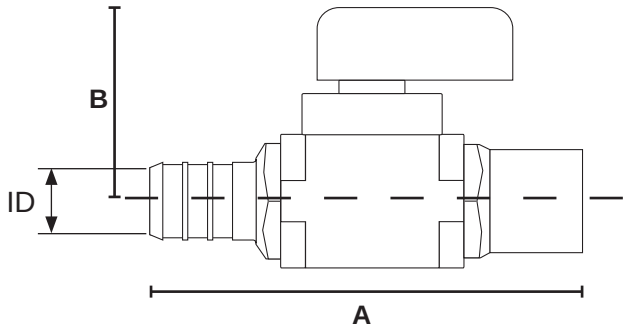

Installation
Installation must follow all of HeatLink's instructions and guidelines.

Related Documents
• HeatLink Limited Plumbing Warranty

Toll Free: 1-800-661-5332
Canada Fax: 1-866-450-1155
USA Fax: 1-800-869-6098

©2015-2017 HeatLink Group Inc.

This page is intentionally blank.