Job or Customer :	
Location :	
Engineer :	
❑ Complies with Spec ❑ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description
Copper elbow allows for 90˚ transitions between tub/shower valve and PEX tubing.

Technical Data
Material:..... Type L copper


Listings
cNSFus-pw

Codes
IAPMO UPC

Standards
ASTM B88
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61

Qty	Stk. #	Connection	Nom. Tube Size	Weight
	28234	½" PEX	½"	0.22 lb (0.10 kg)

Dimensional Diagram

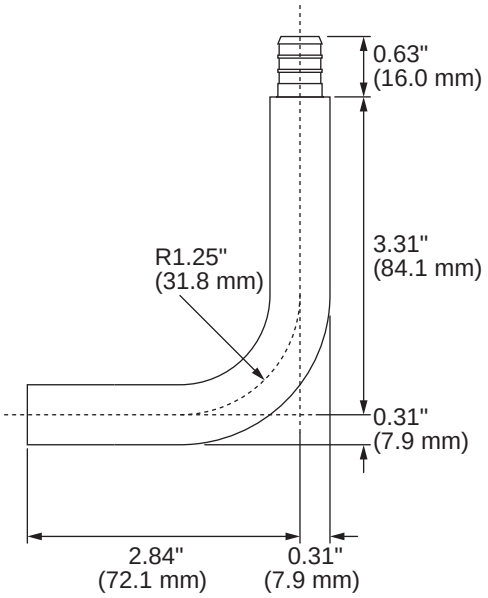

Installation
Installation must follow all of HeatLink's instructions and guidelines.

Related Documents
• HeatLink Limited Plumbing Warranty

©2010-2017 HeatLink Group Inc.

This page is intentionally blank.