
Assembly Kits for 2" Stainless Steel Manifold

Job or Customer :	
Location :	
Engineer :	
❑ Complies with Spec ❑ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description
Assembly kit includes two closed ends with o-ring, two open end adapters with o-ring, and one packet of o-ring lubricant.

Technical Data
Material:..... Stainless Steel
Material - O-ring:..... EPDM
Max Working Pressure ..... 145 psi (10 bar)
Max. Working Temperature ..... 212°F (100°C)

Qty	Stk. #	Dimension A	Dimension B	Dimension C
	76840	⅜" (5 mm)	2" MBSP	1-½" MNPT
	76850	⅜" (5 mm)	2" MBSP	2" MNPT

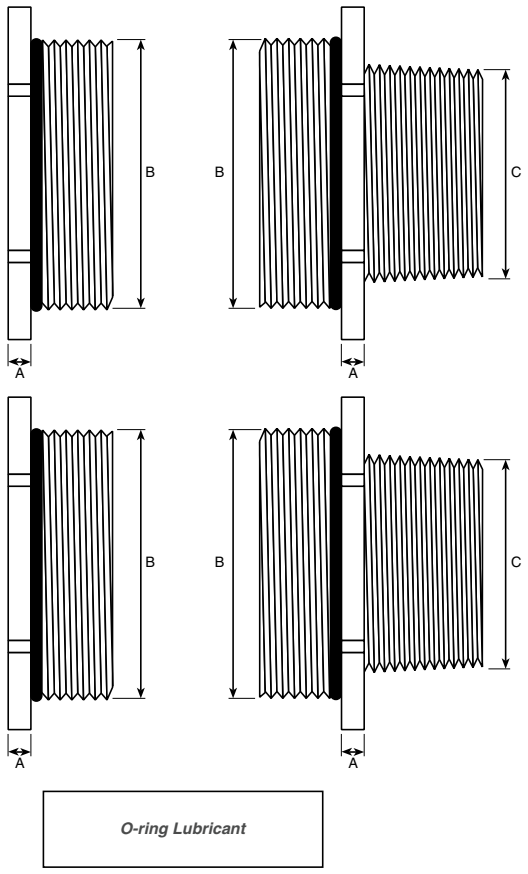

Installation
Installation of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Maintenance
Maintenance of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Related Documents
• Stainless Steel Manifold Assembly Instructions (L676600)
• HeatLink Limited Heating Warranty

Toll Free: 1-800-661-5332
Canada Fax: 1-866-450-1155
USA Fax: 1-800-869-6098

©2012-2018 HeatLink Group Inc.

This page is intentionally blank.