Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Closed one end and ¾" or 1" PEX insert on the other end. ½" branches in single row or opposing rows.

The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.

					Dimensions in/(mm)		
Qty	Stk. #	# of ports	Inlet	Outlet	A	B	Weight
	13204	4	¾"	closed	7.20" (183 mm)	0.71" (18 mm)	0.148 lb (0.067 kg)
	13206	6	¾"	closed	10.75" (273 mm)	0.71" (18 mm)	0.227 lb (0.103 kg)
	13208	8	¾"	closed	14.29" (363 mm)	0.71" (18 mm)	0.295 lb (0.134 kg)

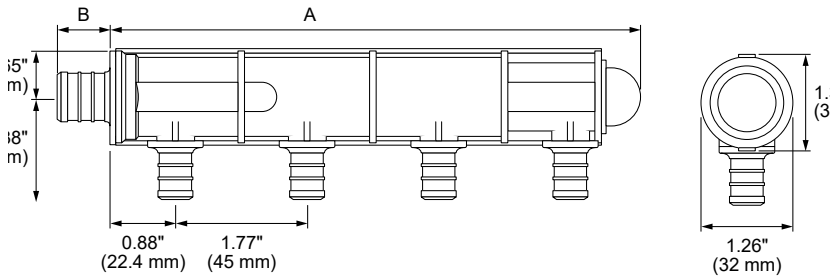

Technical Data

	Specifications
Material	Modified Polyphenylsulfone
Operating Pressure rating	180ºF @ 100psi (82.2ºC @ 0.69MPa)

Listings
ICC-ES PMG 1087
cNSFus-pw
cQAlus P371

Codes
IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards
ASTM E84
ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

All information is subject to change without notice.
Please check our website to ensure you have the latest version of this document.

©2024 HeatLink Group Inc.