Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Open on both ends with ¾" or 1" PEX insert connections. ½" branches in single row or opposing rows.

The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.

					Dimensions in/(mm)			
Qty	Stk. #	# of ports	Inlet	Outlet	A	B	C	Weight
	14204	4	¾"	¾"	6.69" (170 mm)	0.71" (18 mm)	0.71" (18 mm)	0.150 lb (0.068 kg)
	14704	4	1"	¾"	6.69" (170 mm)	0.86" (21.8 mm)	0.71" (18 mm)	0.165 lb (0.075 kg)

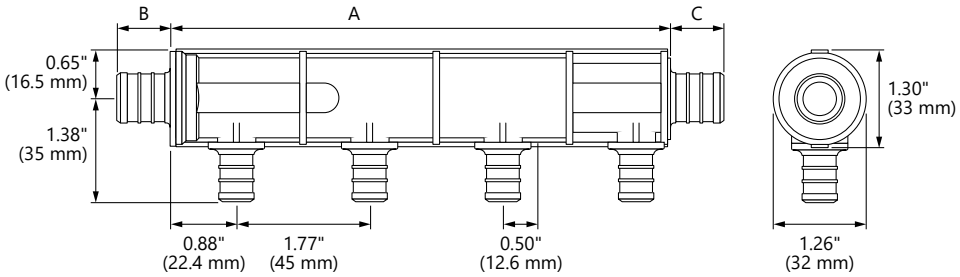

Technical Data

	Specifications
Material	Modified Polyphenylsulfone
Operating Pressure rating	180ºF @ 100psi (82.2ºC @ 0.69MPa)

Listings	Codes	Standards
ICC-ES PMG 1087	IMC	ASTM E84
cNSFus-pw	IPC	ASTM F877
cQAlus P371	IRC	ASTM F2159
	NPC of Canada	CSA B137.5
	NSPC	NSF/ANSI 14
	UMC	NSF/ANSI 61
	UPC	NSF/ANSI 372
		ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

©2024 HeatLink Group Inc.