Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

High Performance Polymer PEX F1960 × swivel adapter for PEX-a potable water expansion systems.

The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.

Qty	Stk. #	Size	Dimension, in/(mm) A	Dimension, in/(mm) ID1	Weight, lb/(kg)
	EX17755	½" PEX × ½" NPSM Swivel	0.707 (18.0)	0.405 (10.3)	0.037 (0.010)

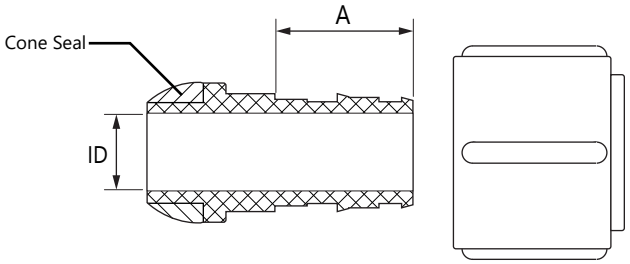

Technical Data

	Specifications
Material	PPSU
Operating Pressure rating	180ºF @ 100psi (82.2ºC @ 0.69MPa)

Listings	Codes	Standards
	IMC	ASTM E84
	IPC	ASTM F877
	IRC	ASTM F1960
ICC-ES PMG 1087	NPC of Canada	CSA B137.5
cNSFus-pw	NSPC	NSF/ANSI 14
cQAlus P371	UMC	NSF/ANSI 61
U.P. Code	UPC	NSF/ANSI 372
		ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

All information is subject to change without notice.
Please check our website to ensure you have the latest version of this document.

©2024 HeatLink Group Inc.