Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

HeatLink PEX-a tubing supports are self gripping galvanized steel, and are ideal for all commercial potable and hydronic installations, maintaining alignment of tubing.

The supports control the direction of expansion and prevent snaking, while allowing more space between hanger placements, saving installation time and money.

Each bundle of five supports comes with fifteen plastic tie straps.

Qty	Stk. #	PEX Size	Length in (mm)	Width in (mm)	Height in (mm)	Weight lb (kg)	Tie Strap Length in (mm)
	88205	½"	108 (2,743)	0.68 (17.29)	0.41 (10.37)	1.1 (0.5)	5.9 (150)
	88222	¾"	108 (2,743)	0.92 (23.44)	0.55 (14.07)	1.5 (0.7)	5.9 (150)
	88228	1"	108 (2,743)	1.17 (29.62)	0.70 (17.82)	1.9 (0.9)	5.9 (150)
	88235	1-¼"	108 (2,743)	1.35 (34.23)	0.76 (19.35)	2.1 (1.0)	10.9 (277)
	88241	1-½"	108 (2,743)	1.54 (39.05)	0.93 (23.56)	2.8 (1.3)	10.9 (277)
	88254	2"	108 (2,743)	2.14 (54.47)	1.32 (33.52)	3.6 (1.6)	10.9 (277)

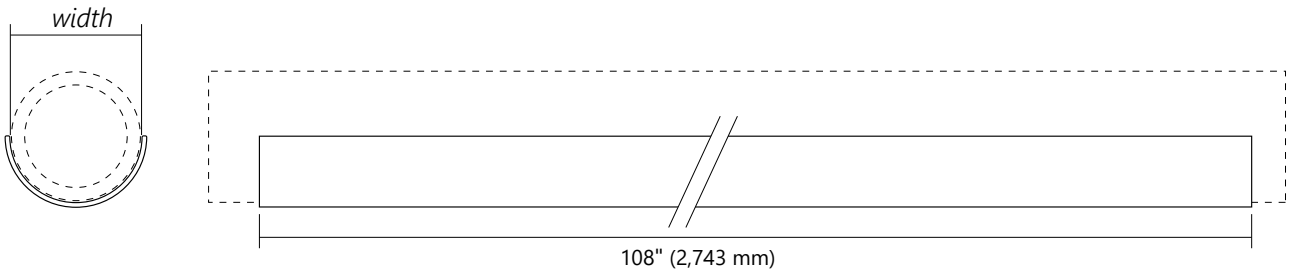

Technical Data

	Specifications
Material - Tubing Support	23ga Galvanized Steel
Material - Cable Tie	Nylon
Tensile Strength - Cable Tie	119 lbs (530 N)
UL 62275 - Cable Tie	Type 21
Plenum Rating - Cable Tie	V-2

All information is subject to change without notice.
Please check our website to ensure you have the latest version of this document.

©2026 HeatLink Group Inc.