Heat Link®
www.heatlinkgroup.com

Surface Mount Manifold Housing
Submittal - Page 1 of 2


Job or Customer :	
Location :	
Engineer :	
❑ Complies with Spec ❑ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description
Allows easy access to the manifold through its locking, removable door. Satin coat steel is well suited for painting. Comes with coin/screwdriver locks, key locks are available. Space is available for mounting a StatLink® module above the manifold.


Technical Data
Material:..... 16Ga satin coat steel

		Dimension						
Qty	**Stk. #**	**A**	**B**	**C**	**D**	**E**	**# of locks**	**Weight**
	71424	24" (610 mm)	30" (762 mm)	5.375" (137 mm)	21.57" (548 mm)	27.59" (701 mm)	2	34.95 lb 15.9 kg
	71430	30" (762 mm)	30" (762 mm)	5.375" (137 mm)	27.57" (700 mm)	27.59" (701 mm)	2	42.0 lb 19.1 kg
	71442	42" (1067 mm)	30" (762 mm)	5.375" (137 mm)	39.57" (1005 mm)	27.59" (701 mm)	3	56.07 lb 25.4 kg

Options
Key lock (#71902) that can field replace the coin/screwdriver lock of the manifold housing door.



Qty	Stk. #
	71902

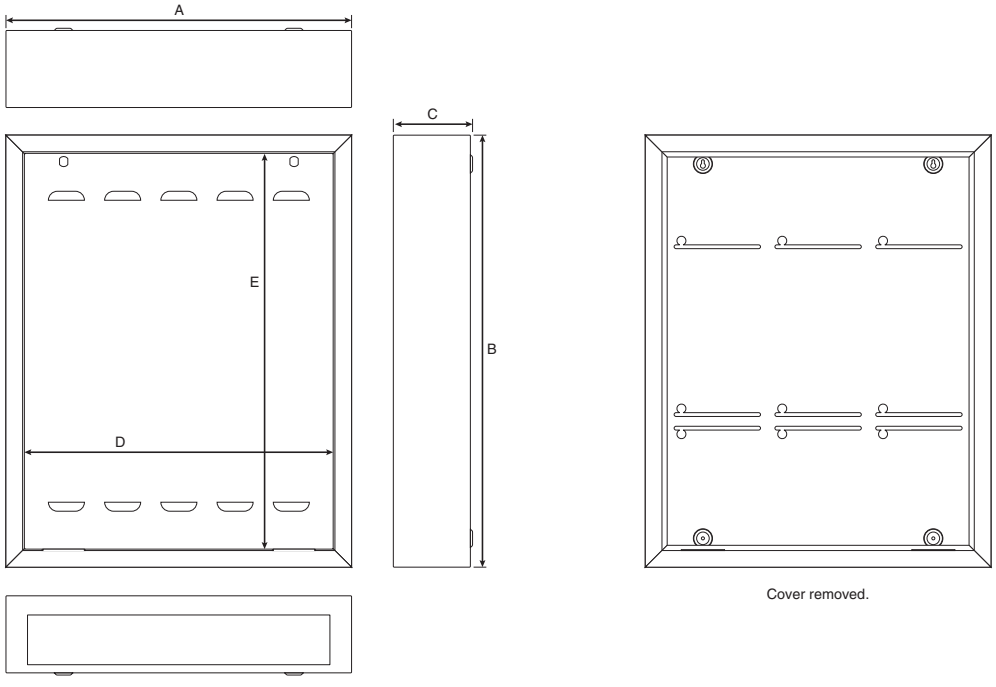


Cover removed.

Toll Free: 1-800-661-5332
Canada Fax: 1-866-450-1155
USA Fax: 1-800-869-6098

©2011 HeatLink Group Inc.

Housing Selection
This table includes an allowance for 90˚ mains piping ①.



# of loops	TwistSeal® Manifold Assembly Kit #: 79400	79401	79402	79200	79201	79202	Stainless Steel Manifold
2	71424	71424	71424	71424	71424	71424	71424
3	71424	71424	71424	71424	71424	71424	71424
4	71424	71424	71430	71424	71424	71424	71424
5	71430	71424	71430	71430	71430	71430	71430
6	71430	71430	71430	71430	71430	71430	71430
7	71430	71430	71442	71442	71442	71442	71430
8	71442	71442	71442	71442	71442	71442	71442
9	71442	71442	71442	71442	71442	71442	71442
10	71442	71442	71442	71442	71442	71442	71442
11	71442	71442	n/a	71442	71442	71442	71442
12	n/a	71442	n/a	n/a	n/a	n/a	71442

Installation
Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents
- Surface Mount Manifold Housing Installation Instructions (L671400)
- Component Warranty

©2011 HeatLink Group Inc.